

BRACKISH WATER REVERSE OSMOSIS (RO) MEMBRANES



LG BW 2521 ES

Energy Saving



OVERVIEW


LG Chem's NanoH₂O™ brackish water RO membranes serve various municipal and industrial applications and have been operating in the major utilities around the world. Incorporating innovative Thin Film Nanocomposite (TFN) technology, all LG BWRO membranes provide superior performance along with intrinsic anti fouling property and are suitable for applications where consistent and reliable performance is a must.

LG BW ES membranes offer high permeability at low feed pressure, significantly reducing operating costs: suitable for low to medium salinity brackish water applications.

PRODUCT SPECIFICATIONS

| Active Membrane Area, ft ² (m ²) | Permeate Flow Rate, GPD (m ³ /d) | Stabilized Salt Rejection, % | Minimum Salt Rejection, % | Feed Spacer, mil |
|---|---|------------------------------|---------------------------|------------------|
| 9.7 (0.9) | 345 (1.3) | 99.5 | 99.2 | 28 |

Test Conditions : 2,000 ppm NaCl at 25°C (77°F), 150 psi (10.3 bar), pH 7, Recovery 8%.
Permeate flows for individual elements may vary +/-20%.

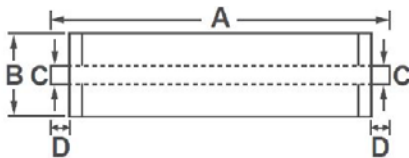

| A, mm (in.) | B, mm (in.) | C, mm (in.) | D, mm (in.) | Weight kg (lbs.) |
|-------------|-------------|-------------|-------------|------------------|
| 533 (21) | 60 (2.4) | 19 (0.75) | 32 (1.3) | 1.0 (2.2) |

OPERATING SPECIFICATIONS

| | |
|--|-------------------------------|
| Max. Applied pressure | 600 psi (41 bar) |
| Max. Chlorine concentration | < 0.1 ppm |
| Max. Operating temperature | 45°C (113°F) |
| pH Range, Continuous (Cleaning) | 2-11 (2-12) |
| Max. Feedwater turbidity | 1.0 NTU |
| Max. Feedwater SDI (15 mins) | 5.0 |
| Max. Feed flow | 6 gpm (1.4 m ³ /h) |
| Max. Pressure drop (ΔP) for each element | 15 psi (1.0 bar) |

The information and data contained herein are deemed to be accurate and reliable and are offered in good faith, but without guarantee of performance. Please contact Aqua-chem for expert advice and technical support.



CONTACT US:
(800) 964-7035
sales@aqua-chem.com
www.aqua-chem.com